

Shop Fitting -

PDU's are used extensively throughout the shop fitting market sector. Certain standard products are shown but RPP offer a bespoke approach to offer its customers solutions to their installation problems. Invariably required for continuous use it is therefore necessary for PDU's to be robustly made from the best materials and to the relevant British and International Standards.

Applications can include:

- Retail Checkout Tills
- Lighting Displays
- Multiple appliance merchandising
- Marketing Display Cabinets



XH - UK Horizontal Mount



List No.	Description	Dim: X	Dim: Y	List No.	Description	Dim: X	Dim: Y
XH4	4 way	305	285	XH10	10 way	605	585
XH5	5 way	355	335	XH12	12 way	705	685
XH6	6 way	405	385	XH15	15 way	855	835
XH8	8 way	505	485	XH20	20 way	1105	1085

XHN- UK Neon Indicated Horizontal Mount




List No.	Description	Dim: X	Dim: Y	List No.	Description	Dim: X	Dim: Y
XH4N	4 way neon	305	285	XH10N	10 way neon	605	585
XH5N	5 way neon	355	335	XH12N	12 way neon	705	685
XH6N	6 way neon	405	385	XH15N	15 way neon	855	835
XH8N	8 way neon	505	485	XH20N	20 way neon	1105	1085

XHS- UK Switched Horizontal Mount



List No.	Description	Dim: X	Dim: Y	List No.	Description	Dim: X	Dim: Y
XH4S	4 way switch	305	285	XH10S	10 way switch	605	585
XH5S	5 way switch	355	335	XH12S	12 way switch	705	685
XH6S	6 way switch	405	385	XH15S	15 way switch	855	835
XH8S	8 way switch	505	485	XH20S	20 way switch	1105	1085

- 16 Amps total load
- Supplied with 3mtrs flex to 13A UK fused plug top
- Red Neon Indicated Double Pole Switch
- For alternative Plugs see 'options page 102'

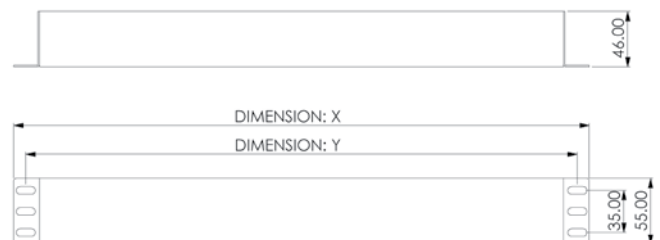

XHG- UK Surge Protected horizontal mount



PDU's fitted with Surge Modules will screen mains borne transients that can effect the performance of or damage certain equipment.

List No.	Description	Dim: X	Dim: Y	List No.	Description	Dim: X	Dim: Y
XH4G	4 way surge	305	285	XH10G	10 way surge	605	585
XH5G	5 way surge	355	335	XH12G	12 way surge	705	685
XH6G	6 way surge	405	385	XH15G	15 way surge	855	835
XH8G	8 way surge	505	485	XH20G	20 way surge	1105	1085

XHSG- UK Surge Protected Switched horizontal mount



List No.	Description	Dim: X	Dim: Y	List No.	Description	Dim: X	Dim: Y
XH4SG	4 way switched surge	355	335	XH10SG	10 way switched surge	655	635
XH5SG	5 way switched surge	405	385	XH12SG	12 way switched surge	755	735
XH6SG	6 way switched surge	455	435	XH15SG	15 way switched surge	905	885
XH8SG	8 way switched surge	555	535	XH20SG	20 way switched surge	1155	1135

XHNG- UK Surge Protected Neon Indicated horizontal mount



List No.	Description	Dim: X	Dim: Y	List No.	Description	Dim: X	Dim: Y
XH4NG	4 way neon surge	305	285	XH10NG	10 way neon surge	605	585
XH5NG	5 way neon surge	355	335	XH12NG	12 way neon surge	705	685
XH6NG	6 way neon surge	405	385	XH15NG	15 way neon surge	855	835
XH8NG	8 way neon surge	505	485	XH20NG	20 way neon surge	1105	1085

Filter specification		Filter specification	
Operating Voltage -	220-250V A.C.	Maximum Clamping Voltage -	710V at 25 Amps
Current Rating -	13 Amps	Withstanding Surge Current -	< 2500A - One Surge
Typical RFI -	56 Db @ 1Mhz	Response Time -	< 25 ns
Attenuation (common mode) -	68DB @ 10 Mhz	Complies to -	EN60950; EN133200
Surge Protection Modules -	L-N; L-E; N-E		

XHU- UK Fuse Protected Horizontal Mount



List No.	Description	Dim: X	Dim: Y	List No.	Description	Dim: X	Dim: Y
XH4U	4 way fused	305	285	XH10U	10 way fused	605	585
XH5U	5 way fused	355	335	XH12U	12 way fused	705	685
XH6U	6 way fused	405	385	XH15U	15 way fused	855	835
XH8U	8 way fused	505	485	XH20U	20 way fused	1105	1085

XHNU- UK Fuse Protected Neon Indicated Horizontal Mount




List No.	Description	Dim: X	Dim: Y	List No.	Description	Dim: X	Dim: Y
XH4NU	4 way neon fused	305	285	XH10NU	10 way neon fused	605	585
XH5NU	5 way neon fused	355	335	XH12NU	12 way neon fused	705	685
XH6NU	6 way neon fused	405	385	XH15NU	15 way neon fused	855	835
XH8NU	8 way neon fused	505	485	XH20NU	20 way neon fused	1105	1085

XHSU- UK Fuse Protected Switched Horizontal Mount



List No.	Description	Dim: X	Dim: Y	List No.	Description	Dim: X	Dim: Y
XH4SU	4 way switched fused	305	285	XH10SU	10 way switched fused	605	585
XH5SU	5 way switched fused	355	335	XH12SU	12 way switched fused	705	685
XH6SU	6 way switched fused	405	385	XH15SU	15 way switched fused	855	835
XH8SU	8 way switched fused	505	485	XH20SU	20 way switched fused	1105	1085

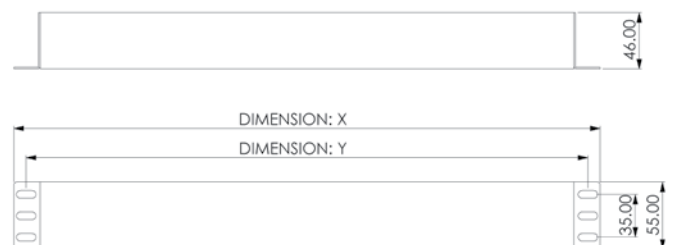

- 16 Amps total load
- Supplied with 3mtrs flex to 13A UK fused plug top
- Red Neon Indicated 16 Amp Double Pole Switch
- For alternative Plugs see 'options page 102'

- UK Interconnecting Horizontal Mount



List No.	Description	Dim: X	Dim: Y
XH2TE	2way iec int	243	220



List No.	Description	Dim: X	Dim: Y
XH2TW	2way wieland int	243	220

- UK Interconnecting Switched Horizontal Mount



List No.	Description	Dim: X	Dim: Y
XH2STE	2way switch iec int	293	270



List No.	Description	Dim: X	Dim: Y
XH2STW	2way switch wieland int	293	270

- UK Interconnecting Switched Fused Horizontal Mount



List No.	Description	Dim: X	Dim: Y
XH2SUTE	2way switch fuse iec int	305	282



List No.	Description	Dim: X	Dim: Y
XH2SUTW	2way switch fuse wieland int	305	282

- Interconnecting Power leads & links

List No.	Description
WL1	1 Metre male to female Wieland
WL2	2 Metre male to female Wieland
WL3	3 Metre male to female Wieland
WL1S	1 Metre UK to female Wieland
WL2S	2 Metre UK to female Wieland
WL3S	3 Metre UK to female Wieland



- Wieland Power out



- 1.50mm² Power lead

List No.	Description
DL1	1 Metre male to female IEC
DL2	2 Metre male to female IEC
DL3	3 Metre male to female IEC
DL1S	1 Metre UK to female IEC
DL2S	2 Metre UK to female IEC
DL3S	3 Metre UK to female IEC



- IEC 60320 Power out



- 0.75mm² Power lead

- UK Interconnecting Horizontal Mount



List No.	Description	Dim: X	Dim: Y
XH4TE	4way iec int	343	320



List No.	Description	Dim: X	Dim: Y
XH4TW	4way wieland int	343	320

- UK Interconnecting Switched Horizontal Mount



List No.	Description	Dim: X	Dim: Y
XH4STE	4way switch iec int	393	370



List No.	Description	Dim: X	Dim: Y
XH4STW	4way switch wieland int	393	370

- UK Interconnecting Switched Fused Horizontal Mount



List No.	Description	Dim: X	Dim: Y
XH4SUTE	4way switch fuse iec int	405	382



List No.	Description	Dim: X	Dim: Y
XH4SUTW	4way switch fuse wieland int	405	382

- 16 Amps total load
- Wieland inlet/outlets 16Amps
- IEC 60320 inlet/outlets 10Amps
- Fused @ 13Amps
- Red Neon Indicated 16 Amp Double Pole Switch

